Installation Instructions
Cabin Filter

Instrucciones de montaje
Filtro de habitaculo

Notice de montage
Filtre d' habitacle

CABIN FILTER
BE-930

LOCATION: BEHIND THE GLOVE COMPARTMENT

QUANTITY USED: 1

DEGREE OF DIFFICULTY: EASY

ESTIMATED INSTALLATION TIME: 18 MINUTES

1. Remove the glove compartment damper, Figure 1.
2. Disengage the glove compartment stops, then remove the glove compartment, Figure 2.
3. Disengage the claw to remove the cabin air filter, Figure 3.
4. Install the new cabin air filter element. Ensure the filter element marking is facing the proper direction.
5. Position the glove compartment to the instrument panel, then install the damper.

⚠ WARNING

STOP

Turn The Engine Off
Failure to do so may cause electrocution, burns and severe injury.

1.

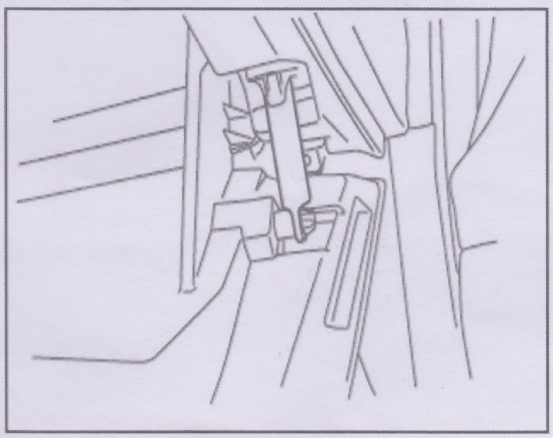

2.

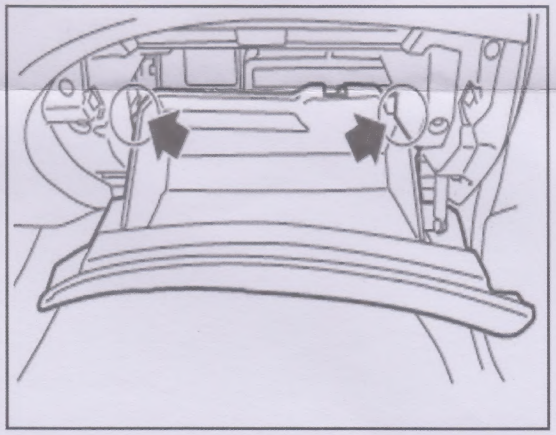
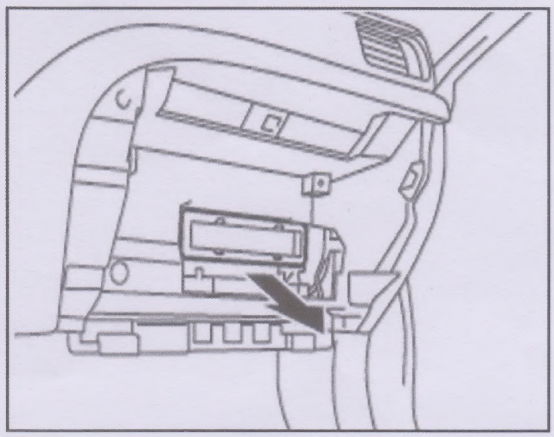
3.